


# PT-100G-SR-BD-RX

## DATASHEET

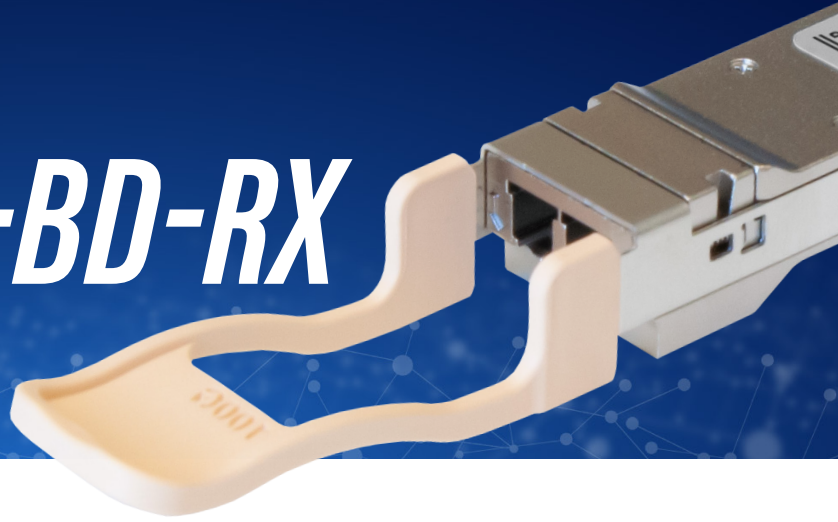

### GENERAL DESCRIPTION

This product is a parallel Quad Small Form-factor Pluggable (QSFP28) RX-only optical module supporting 100Gb/s bit rate. This module integrates/converts two optical lanes into four lanes electrical data (to host) (by Dual Wavelength Optical Interface, 850nm and 900nm) to allow one-way optical communication over a 2-fiber LC optical multi-mode fiber. The module de-multiplexes 2 sets of optical input signal and converts them to 4 channels of electrical data.

An optical fiber ribbon cable with an LC connector can be plugged into the QSFP28 module receptacle. Proper alignment is ensured by the guide pins inside the receptacle. The cable usually cannot be twisted for proper channel to channel alignment. Electrical connection is achieved through an MSA-compliant 38-pin edge type connector.

The module operates by a single +3.3V power supply. LVCMOS/ LVTTTL global control signals, such as Module Present, Reset, Interrupt and Low Power Mode, are available with the modules. A 2-wire serial interface is available to send and receive more complex control signals, and to receive digital diagnostic information. Individual channels can be addressed and unused channels can be shut down for maximum design flexibility.

The product is designed with form factor, optical/electrical connection and digital diagnostic interface according to the QSFP28 Multi-Source Agreement (MSA). It has been designed to meet the harshest external operating conditions including temperature, humidity and EMI interference. The module offers very high functionality and feature integration, accessible via a two-wire serial interface.

### PRODUCT FEATURES

- ▶ QSFP28 MSA compliant
- ▶ Supports 100GE aggregate bit rate
- ▶ Supports KP4 FEC @ 100G data rate
- ▶ Two independent RX-only channels
- ▶ Up to 100m OM4 MMF transmission
- ▶ Operating case temperature: -10 to 60 °C @ 100G
- ▶ Single 3.3V power supply
- ▶ Maximum power consumption 4W
- ▶ LC optical connector
- ▶ RoHS-6 compliant

### APPLICATIONS

- ▶ 100G Ethernet
- ▶ Data Center
- ▶ Infiniband HDR

## FUNCTIONAL DESCRIPTION

This product is a parallel Quad Small Form-factor Pluggable (QSFP28) RX-only optical module supporting 100Gb/s bit rate. This module integrates/converts two optical lanes into four lanes electrical data (to host) (by Dual Wavelength Optical Interface, 850nm and 900nm) to allow one-way optical communication over a 2-fiber LC optical multi-mode fiber. The module de-multiplexes 2 sets of optical input signal and converts them to 4 channels of electrical data. The receiver module outputs electrical signals are also voltage compatible with Common Mode Logic (CML) levels. Figure 1 shows the functional block diagram of this product.

A single +3.3V power supply is required to power up the module. As per MSA specifications the module offers 7 low speed hardware control pins (including the 2-wire serial interface): ModSelL, SCL, SDA, ResetL, LPMode, ModPrsL and IntL.

Module Select (ModSelL) is an input pin. When held low by the host, the module responds to 2-wire serial communication commands. The ModSelL allows the use of multiple QSFP28 modules on a single 2-wire interface bus — individual ModSelL lines for each QSFP28 module must be used.

Serial Clock (SCL) and Serial Data (SDA) are required for the 2-wire serial bus communication interface and enable the host to access the QSFP28 memory map.

The ResetL pin enables a complete module reset, returning module settings to their default state, when a low level on the ResetL pin is held for longer than the minimum pulse length. During the execution of a reset the host shall disregard all status bits until the module indicates a completion of the reset interrupt. The module indicates this by posting an IntL (Interrupt) signal with the Data\_Not\_Ready bit negated in the memory map. Note that on power up (including hot insertion) the module should post this completion of reset interrupt without requiring a reset.

Module Present (ModPrsL) is a signal local to the host board which, in the absence of a module, is normally pulled up to the host Vcc. When a module is inserted into the connector, it completes the path to ground through a resistor on the host board and asserts the signal. ModPrsL then indicates a module is present by setting ModPrsL to a "Low" state.

Interrupt (IntL) is an output pin. Low indicates a possible module operational fault or a status critical to the host system. The host identifies the source of the interrupt using the 2-wire serial interface. The IntL pin is an open collector output and must be pulled to the Host Vcc voltage on the Host board.

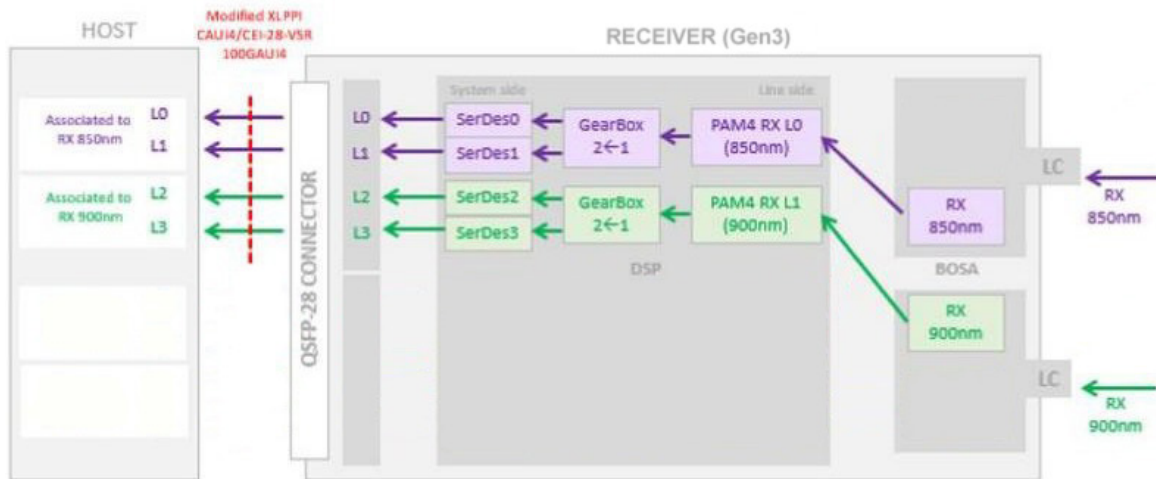


Figure 1. Transceiver Block Diagram

## ABSOLUTE MAXIMUM RATINGS

It has to be noted that the operation in excess of any individual absolute maximum ratings might cause permanent damage to this module.

Parameter	Symbol	Min	Max	Unit
Storage Temperature	$T_S$	-40	+85	°C
Case Operating Temperature	$T_{OP}$	10	70	°C
Power Supply Voltage	$V_{CC}$	-0.5	3.6	V
Relative Humidity (non-condensing)	RH	0	85	%
Damage Threshold	$TH_d$	5		dBm

## RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Min	Typical	Max	Unit	Note
Case Operating Temperature	$T_{OP}$	10		+60	°C	
Power Supply Voltage	$V_{CC}$	3.135	3.3	+3.465	V	
Data Rate Accuracy		-100		100	ppm	
Pre-FEC Bit Error Ratio				$2.4 \times 10^{-4}$		
Post-FEC Bit Error Ratio				$1 \times 10^{-12}$		1
Control Input Voltage High		2		$V_{CC}$	V	
Control Input Voltage Low		0		0.8	V	
Link Distance	OM3	D1		70	m	2
	OM4	D2		100	m	2
	OM5	D3		150	m	2

### Notes:

1. FEC provided by host system.
2. FEC required on host system to support maximum distance.

# OPTICAL CHARACTERISTICS

## RECEIVER

Parameter	Symbol	KP4 FEC Mode			Unit	Note
		Min	Typical	Max		
Optical Center Wavelength Line0	$\lambda_c$	844	850	863	nm	
Optical Center Wavelength Line1	$\lambda_c$	900	910	918	nm	
Damage Threshold, each lane	$TH_d$	5			dBm	1
Average Receive Power, each lane		-8.2			dBm	2
Average power at Receiver Input, each lane (overload)				4	dBm	
Receiver Reflectance	$R_r$			-12	dB	
Stressed Receiver Sensitivity in OMA, Lane2				-3.5	dBm	3
Receiver Sensitivity (OMA outer), each lane				Max (-6.6, SECQ - 8) as per IEEE CI 150	dBm	
LOS Assert	LOSA	-30		-14.2	dBm	
LOS Deassert	LOSD			-11.2	dBm	
LOS Hysteresis	LOSH	0.5			dB	

### Notes:

1. The receiver shall be able to tolerate, without damage, continuous exposure to a modulated optical input signal having this power level on one lane. The receiver does not have to operate correctly at this input power.
2. Average receive power, each lane (min) is informative and not the principal indicator of signal strength. A received power below this value cannot be compliant; however, a value above this does not ensure compliance.
3. Measured with conformance test signal at TP3 as per following:

Stressed eye closure (SECq), each lane	4.5	dB
OMA of each aggressor, each lane	3	dBm

# ELECTRICAL CHARACTERISTICS

The following electrical characteristics are defined over the Recommended Operating Environment unless otherwise specified.

Parameter	Test Point	Min	Max	Unit	Note
Power Dissipation			4	W	
Supply Current	Icc		1.21	A	
<b>Receiver (each lane)</b>					
Differential Voltage pk-pk	TP4		900	mV	
Common Mode Voltage (Vcm)	TP4	-350	2850	mV	1
Common Mode Noise, RMS	TP4		17.5	mV	
Differential Termination Resistance Mismatch	TP4		10	%	At 1MHz
Differential Return Loss (SDD22)	TP4		See CEI-28G-VSR Equation 13-19	dB	
Common Mode to Differential conversion and Differential to Common Mode conversion (SDC22, SCD22)	TP4		See CEI-28G-VSR Equation 13-21	dB	
Common Mode Return Loss (SCC22)	TP4		-2	dB	2
Transition Time, 20 to 80%	TP4	9.5		ps	
Vertical Eye Closure (VEC)	TP4		5.5	dB	
Eye Width at 10 <sup>-15</sup> Probability (EW15)	TP4	0.57		UI	
Eye Width at 10 <sup>-15</sup> Probability (EH15)	TP4	228		mV	

**Notes:**

1. Vcm is generated by the host. Specification includes effects of ground offset voltage.
2. From 250MHz to 30GHz.

# PIN ASSIGNMENT

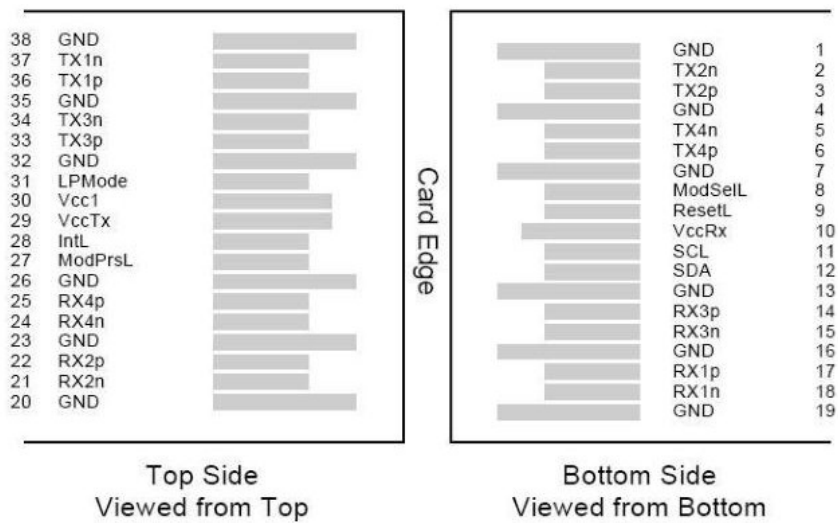


Figure 2. MSA Compliant Connector


## PIN DEFINITION

Pin	Logic	Symbol	Name / Description	Note
1		GND	Ground	1
2	CML-I	Tx2n	Transmitter Inverted Data Input	
3	CML-I	Tx2p	Transmitter Non-Inverted Data Input	
4		GND	Ground	1
5	CML-I	Tx4n	Transmitter Inverted Data Input	
6	CML-I	Tx4p	Transmitter Non-Inverted Data Input	
7		GND	Ground	1
8	LVTTL-I	ModSelL	Module Select	
9	LVTTL-I	ResetL	Module Reset	
10		VccRx	+3.3 V Power Supply Receiver	2
11	LVC MOS-I/O	SCL	2-Wire Serial Interface Clock	
12	LVC MOS-I/O	SDA	2-Wire Serial Interface Data	
13		GND	Ground	
14	CML-O	Rx3p	Receiver Non-Inverted Data Output	
15	CML-O	Rx3n	Receiver Inverted Data Output	
16		GND	Ground	1
17	CML-O	Rx1p	Receiver Non-Inverted Data Output	
18	CML-O	Rx1n	Receiver Inverted Data Output	
19		GND	Ground	1
20		GND	Ground	1
21	CML-O	Rx2n	Receiver Inverted Data Output	
22	CML-O	Rx2p	Receiver Non-Inverted Data Output	
23		GND	Ground	1
24	CML-O	Rx4n	Receiver Inverted Data Output	1
25	CML-O	Rx4p	Receiver Non-Inverted Data Output	
26		GND	Ground	1
27	LVTTL-O	ModPrsL	Module Present	
28	LVTTL-O	IntL	Interrupt	
29		VccTx	+3.3 V Power Supply Transmitter	2
30		Vcc1	+3.3 V Power Supply	2
31	LVTTL-I	LPMODE	Low Power Mode	
32		GND	Ground	1
33	CML-I	Tx3p	Transmitter Non-Inverted Data Input	
34	CML-I	Tx3n	Transmitter Inverted Data Input	
35		GND	Ground	1
36	CML-I	Tx1p	Transmitter Non-Inverted Data Input	
37	CML-I	Tx1n	Transmitter Inverted Data Input	
38		GND	Ground	1

**Notes:**

1. GND is the symbol for signal and supply (power) common for QSFP28 modules. All are common within the QSFP28 module and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal common ground plane.
2. VccRx, Vcc1 and VccTx are the receiver and transmitter power suppliers and shall be applied concurrently. Recommended host board power supply filtering is shown in Figure 4 below. Vcc Rx, Vcc1 and Vcc Tx may be internally connected within the QSFP28 transceiver module in any combination. The connector pins are each rated for a maximum current of 1000mA.

**RECOMMENDED POWER SUPPLY FILTER**

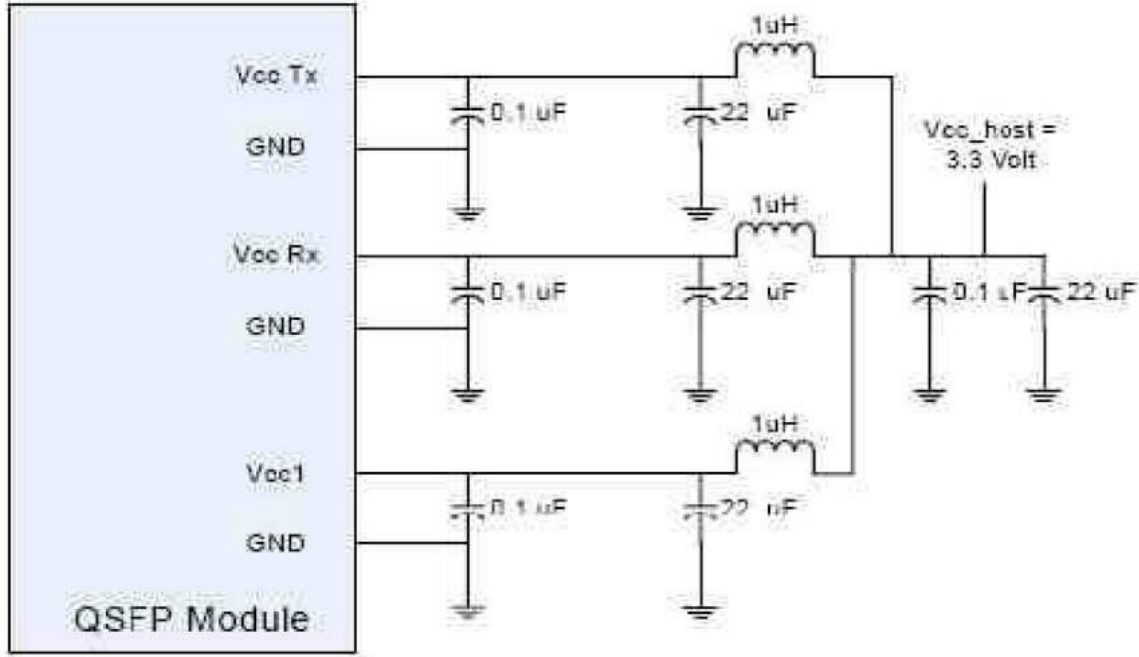

**DIGITAL DIAGNOSTIC FUNCTIONS**



The following digital diagnostic characteristics are defined over the Recommended Operating Environment unless otherwise specified. It is compliant to SFF-8436.

Parameter	Symbol	Min	Max	Unit	Note
Temperature monitor absolute error	DMI_Temp	-3	3	°C	1
Supply voltage monitor absolute error	DMI_VCC	-0.15	0.15	V	2
Channel RX power monitor absolute error	DMI_RX_Ch	-2	2	dB	3
Channel Bias current monitor	DMI_Ibias_Ch	-10%	10%	mA	4
Channel TX power monitor absolute error	DMI_TX_Ch	-2	2	dB	1

**Notes:**

1. Over operating temperature range
2. Over full operating temperature range
3. Due to measurement accuracy of different single mode fibers, there could be an additional +/- 1 dB fluctuation, or a +/- 3 dB total accuracy.
4. Ch1~Ch4

## MECHANICAL DIMENSIONS

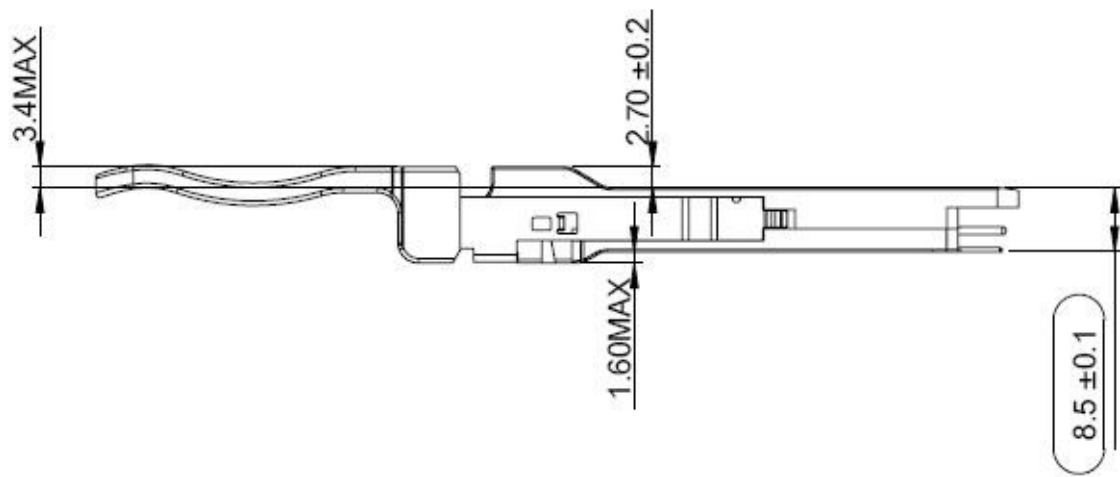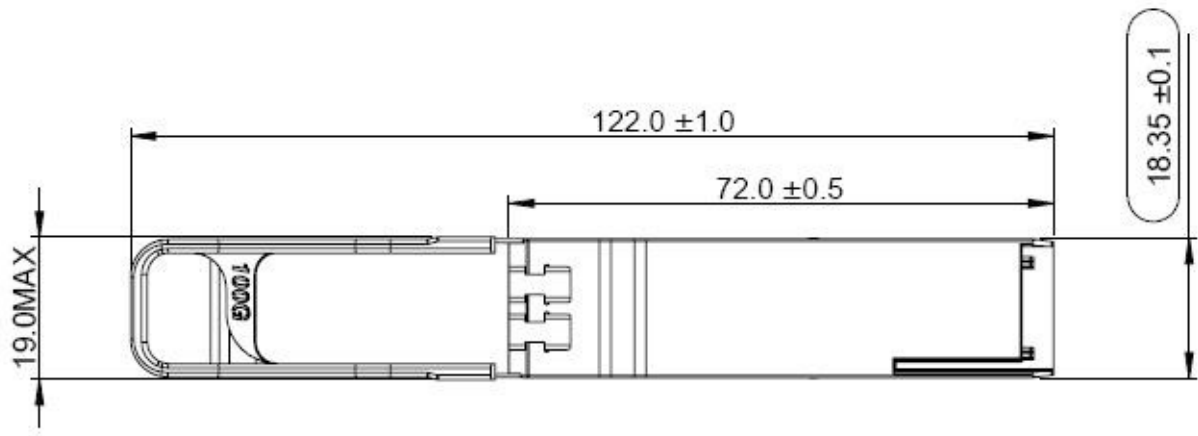



## ORDERING INFORMATION

Part Number	Product Description
PT-100G-SR-BD-RX	RX ONLY 100GBASE-SR BIDI QSFP28

### ESD

This receiver is specified as ESD threshold 1kV for high speed data pins and 2kV for all others electrical input pins, tested per MIL-STD-883, Method 3015.4 /JESD22- A114-A (HBM). However, normal ESD precautions are still required during the handling of this module. This receiver is shipped in ESD protective packaging. It should be removed from the packaging and handled only in an ESD protected environment.

### LASER SAFETY

This is a Class 1 Laser Product according to EN 60825 -1:2014. This product complies with 21 CFR 1040.10 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

**Caution:** Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.