

PT-25G-SR-85

DATASHEET



1. PRODUCT FEATURES

- ▶ Hot-pluggable SFP28 form factor
- ▶ Supports 25Gbps data rate
- ▶ Maximum link length of 70m on OM3 MMF and 100m on OM4 MMF
- ▶ 850nm VCSEL laser and PIN photo-detector
- ▶ Internal CDR on both Transmitter and Receiver channel
- ▶ Duplex LC receptacle
- ▶ Single 3.3V power supply
- ▶ Power dissipation < 1W
- ▶ Digital diagnostics functions are available via the I2C interface
- ▶ RoHS-6 compliant
- ▶ Commercial case temperature range:
Standard : 0 to +70°C
Industrial : -40 to +85°C


2. GENERAL DESCRIPTION

Profitap PT-25G-SR-85 is a single-Channel, Pluggable, Fiber-Optic SFP28 for 25 Gigabit Ethernet and Infiniband EDR Applications. It is a high performance module for short-range data communication and interconnect applications which operate at 25.78125 Gbps up to 70 m using OM3 fiber or 100 m using OM4 fiber. This module is designed to operate over multimode fiber systems using a nominal wavelength of 850nm. The electrical interface uses a 20 contact edge type connector. The optical interface uses duplex LC receptacle. This module incorporates Profitap proven circuit and VCSEL technology to provide reliable long life, high performance, and consistent service.

APPLICATIONS

- ▶ 25GBASE-SR Ethernet

3. BLOCK DIAGRAM

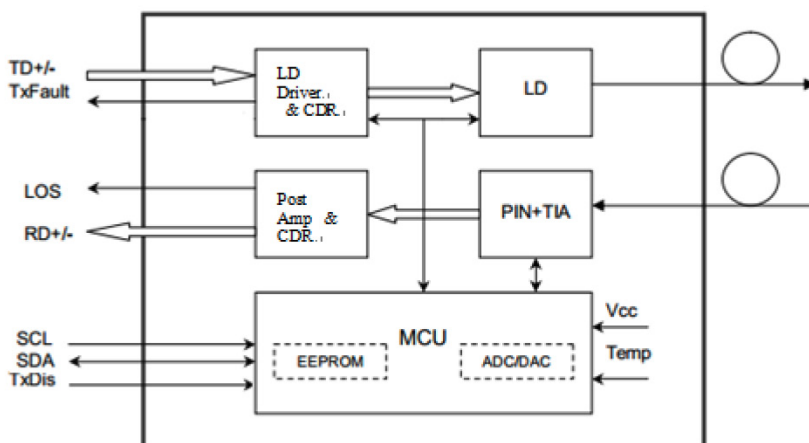

4. ABSOLUTE MAXIMUM RATINGS

| Parameter | Symbol | Min | Max | Unit | Notes |
|---------------------|--------|-----|-----|------|-------|
| Supply Voltage | VCC | 0 | 3.6 | °C | |
| Storage Temperature | Ts | -40 | +85 | °C | |
| Operating Humidity | - | 5 | 85 | % | |

5. RECOMMENDED OPERATING CONDITIONS

| Parameter | Symbol | Min | Typical | Max | Unit |
|---|--------|------|---------|------|------|
| Operating Case Temperature Commercial | Tc | 0 | | +70 | °C |
| Power Supply Voltage | VCC | 3.13 | 3.3 | 3.47 | V |
| Power Supply Current | Icc | | | 300 | mA |
| Fiber Length on 50/125µm high-bandwidth (OM3) MMF | | | | 70 | m |
| Fiber Length on 50/125µm high-bandwidth (OM4) MMF | | | | 100 | m |

6. OPTICAL AND ELECTRICAL CHARACTERISTICS

TRANSMITTER

| Parameter | Symbol | Min | Typical | Max | Unit | Notes |
|-------------------------------|-------------|------|---------|------|----------|-------|
| Data rate | BR | | 25.78 | | Gbps | |
| Centre Wavelength | λ_C | 840 | 850 | 860 | nm | |
| Spectral Width (-20dB) | σ | | | 0.6 | nm | |
| Average Output Power | Pavg | -8.4 | | 2.4 | dBm | |
| Optical Power OMA | POMA | -6.4 | | 3 | dBm | |
| Extinction Ratio | ER | 2 | | | dB | |
| Differential data input swing | VIN,PP | 40 | | 1000 | mV | |
| Input Differential Impedance | ZIN | 90 | 100 | 110 | Ω | |
| TX Disable | Disable | 2.0 | | Vcc | V | |
| | Enable | 0 | | 0.8 | V | |
| TX Fault | Fault | 2.0 | | Vcc | V | |
| | Normal | 0 | | 0.8 | V | |

RECEIVER

| Parameter | Symbol | Min | Typical | Max | Unit | Notes |
|--------------------------------|---------------|------------|----------------|------------|-------------|--------------|
| Data rate | BR | | 25.78 | | Gbps | |
| Centre Wavelength | λ_C | 840 | 850 | 860 | nm | |
| Receiver Sensitivity (OMA) | Psens | - | - | -10 | dBm | |
| Stressed Sensitivity (OMA) | | - | - | -5.2 | dBm | |
| Receiver Power (OMA) | | | | 3 | dBm | |
| LOS De-Assert | LOSD | 2 | | -13 | dBm | |
| LOS Assert | LOSA | -30 | | | dBm | |
| LOS Hysteresis | | 0.5 | | | dB | |
| Differential data output swing | Vout,PP | 500 | | 1130 | mV | |
| LOS | High | 2.0 | | Vcc | V | |
| | Low | | | 0.8 | V | |

7. TIMING AND ELECTRICAL

| <i>Parameter</i> | <i>Symbol</i> | <i>Min.</i> | <i>Max.</i> | <i>Unit</i> | <i>Conditions</i> |
|---|-----------------------|-------------|-------------|-------------|--|
| Tx_Disable assert time | t_off | | 100 | μs | Rising edge of Tx_Disable to fall of output signal below 10% of nominal |
| Tx_Disable negate time | t_on | | 2 | ms | Falling edge of Tx_Disable to rise of output signal above 90% of nominal. This only applies in normal operation, not during start up or fault recovery. |
| Time to initialize 2-wire interface | t_2w_start_up | | 300 | ms | From power on or hot plug after the supply meeting Table 8 . |
| Time to initialize | t_start_up | | 300 | ms | From power supplies meeting Table 8 or hot plug or Tx disable negated during power up, or Tx_Fault recovery, until non-cooled power level I part (or non-cooled power level II part already enabled at power level II for Tx_Fault recovery) is fully operational. |
| Time to initialize cooled module and time to power up a cooled module to Power Level II | t_start_up_cooled | | 90 | s | From power supplies meeting Table 8 or hot plug, or Tx disable negated during power up or Tx_Fault recovery, until cooled power level I part (or cooled power level II part during fault recovery) is fully operational. Also, from stop bit low-to-high SDA transition enabling Power Level II until cooled module is fully operational |
| Time to Power Up to Level II | t_power_level2 | | 300 | ms | From stop bit low-to-high SDA transition enabling power level II until non-cooled module is fully operational |
| Time to Power Down from Level II | t_power_down | | 300 | ms | From stop bit low-to-high SDA transition disabling power level II until module is within power level I requirements |
| Tx_Fault assert | Tx_Fault_on | | 1 | ms | From occurrence of fault to assertion of Tx_Fault |
| Tx_Fault assert for cooled module | Tx_Fault_on_cooled | | 50 | ms | From occurrence of fault to assertion of Tx_Fault |
| Tx_Fault Reset | t_reset | 10 | | μs | Time Tx_Disable must be held high to reset Tx_Fault |
| RS0, RS1 rate select timing for FC | t_RS0_FC, t_RS1_FC | | 500 | μs | From assertion till stable output |
| RS0, RS1 rate select timing non FC | t_RS0, t_RS1 | | 24 | ms | From assertion till stable output |
| Rx_LOS assert delay | t_los_on | | 100 | μs | From occurrence of loss of signal to assertion of Rx_LOS |
| Rx_LOS negate delay | t_los_off | | 100 | μs | From occurrence of presence of signal to negation of Rx_LOS |

8. DIAGNOSTICS SPECIFICATION

| Parameter | Range | Unit | Accuracy | Calibration |
|--------------|------------|------|----------|---------------------|
| Temperature | 0 to +70 | °C | ±3°C | Internal / External |
| Voltage | 3.0 to 3.6 | V | ±3% | Internal / External |
| Bias Current | 0 to 20 | mA | ±10% | Internal / External |
| TX Power | -8 to 3 | dBm | ±3dB | Internal / External |
| RX Power | -14 to 0 | dBm | ±3dB | Internal / External |


10. DIGITAL DIAGNOSTIC MEMORY MAP

The transceivers provide serial ID memory contents and diagnostic information about the present operating conditions by the 2-wire serial interface (SCL, SDA).


The diagnostic information with internal calibration or external calibration all are implemented, including received power monitoring, transmitted power monitoring, bias current monitoring, supply voltage monitoring and temperature monitoring.

The digital diagnostic memory map specific data field defines as following.




2 wire address 1010000X (A0h)

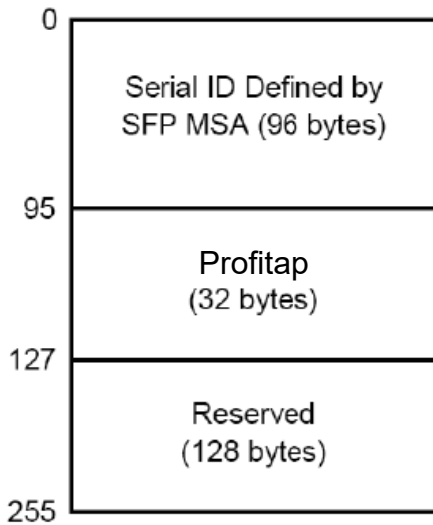

2 wire address 1010001X (A2h)

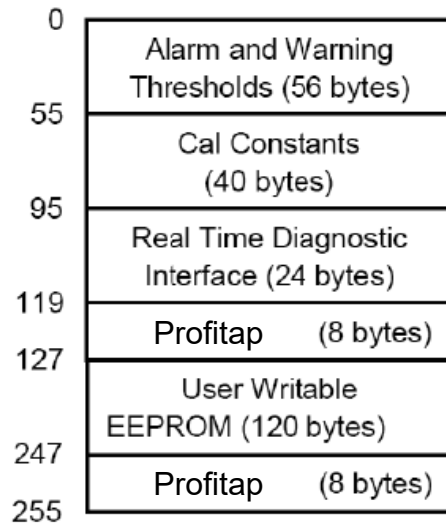

11. PIN DEFINITIONS

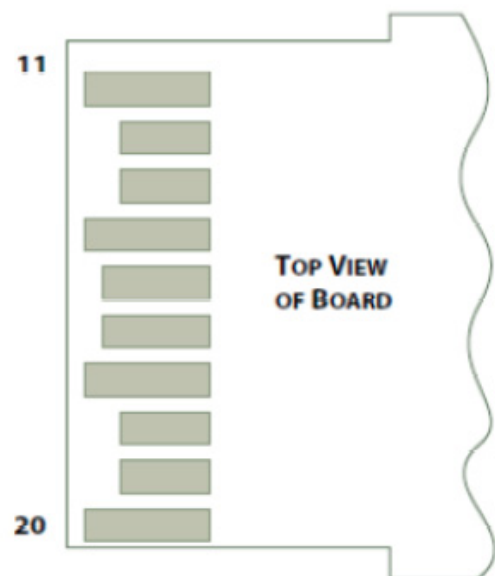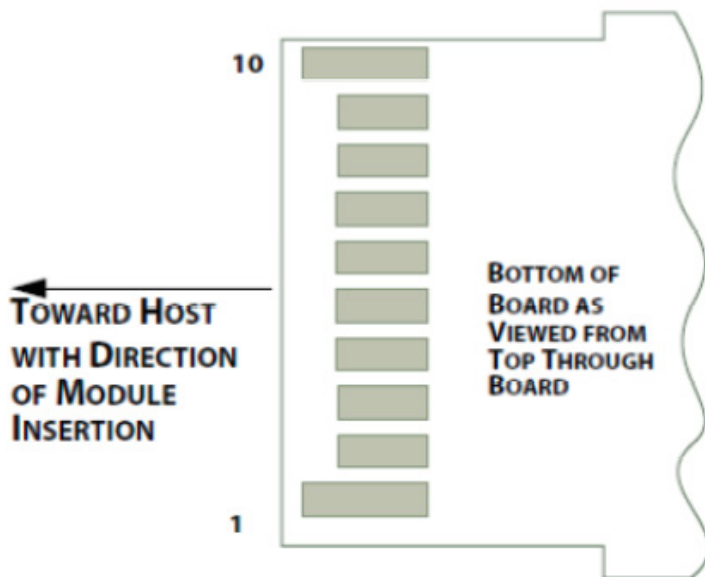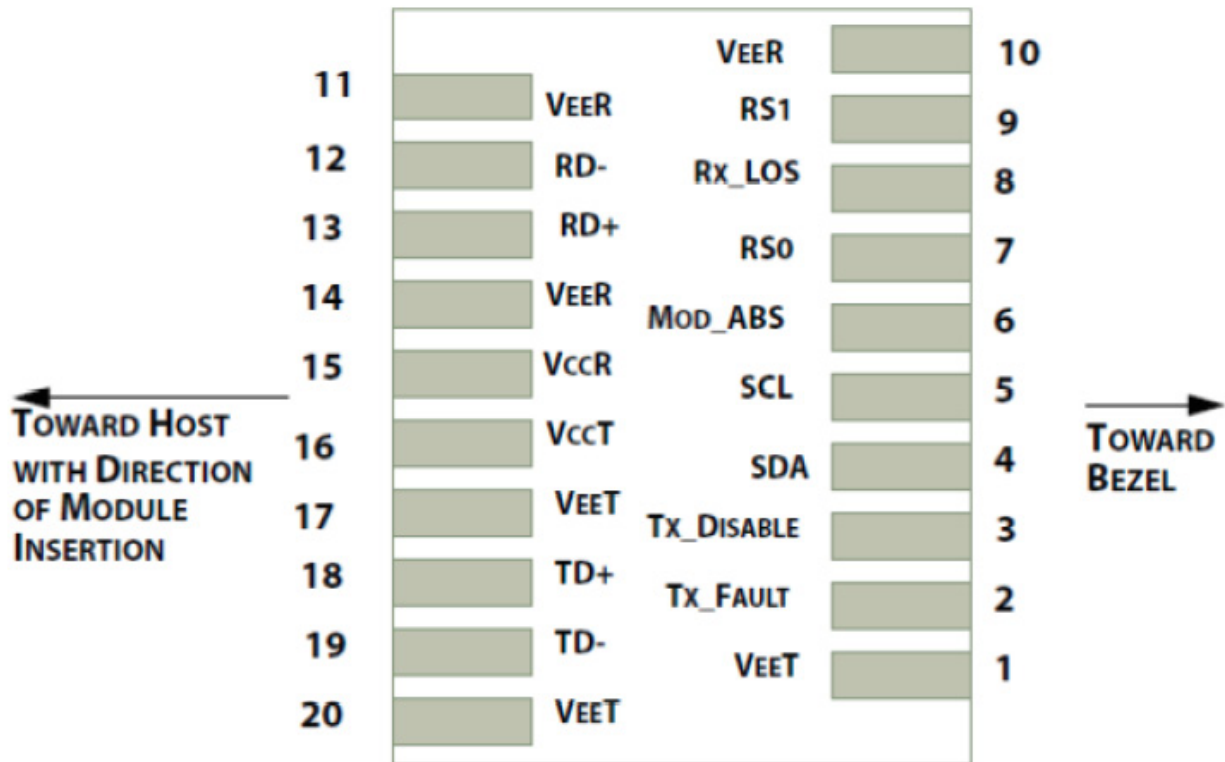



12. PIN DESCRIPTIONS

| <i>PIN</i> | <i>Logic</i> | <i>Symbol</i> | <i>Name / Description</i> | <i>Note</i> |
|-------------------|---------------------|----------------------|---|--------------------|
| 1 | | VeeT | Module Transmitter Ground | 1 |
| 2 | LVTTL-O | TX_Fault | Module Transmitter Fault | 2 |
| 3 | LVTTL-I | TX_Dis | Transmitter Disable; Turns off transmitter laser output | |
| 4 | LVTTL-I/O | SDA | 2-Wire Serial Interface Data Line | 2 |
| 5 | LVTTL-I | SCL | 2-Wire Serial Interface Clock | 2 |
| 6 | | MOD_ABS | Module Definition, Grounded in the module | |
| 7 | LVTTL-I | RS0 | Receiver Rate Select | |
| 8 | LVTTL-O | RX_LOS | Receiver Loss of Signal Indication Active LOW | |
| 9 | LVTTL-I | RS1 | Transmitter Rate Select (not used) | |
| 10 | | VeeR | Module Receiver Ground | 1 |
| 11 | | VeeR | Module Receiver Ground | 1 |
| 12 | CML-O | RD- | Receiver Inverted Data Output | |
| 13 | CML-O | RD+ | Receiver Data Output | |
| 14 | | VeeR | Module Receiver Ground | 1 |
| 15 | | VccR | Module Receiver 3.3 V Supply | |
| 16 | | VccT | Module Receiver 3.3 V Supply | |
| 17 | | VeeT | Module Transmitter Ground | 1 |
| 18 | CML-I | TD+ | Transmitter Non-Inverted Data Input | |
| 19 | CML-I | TD- | Transmitter Inverted Data Input | |
| 20 | | VeeT | Module Transmitter Ground | 1 |


NOTE

- 1.** Module ground pins GND are isolated from the module case.
- 2.** Shall be pulled up with 4.7K-10Kohms to a voltage between 3.15V and 3.45V on the host board.

13. RECOMMENDED INTERFACE CIRCUIT

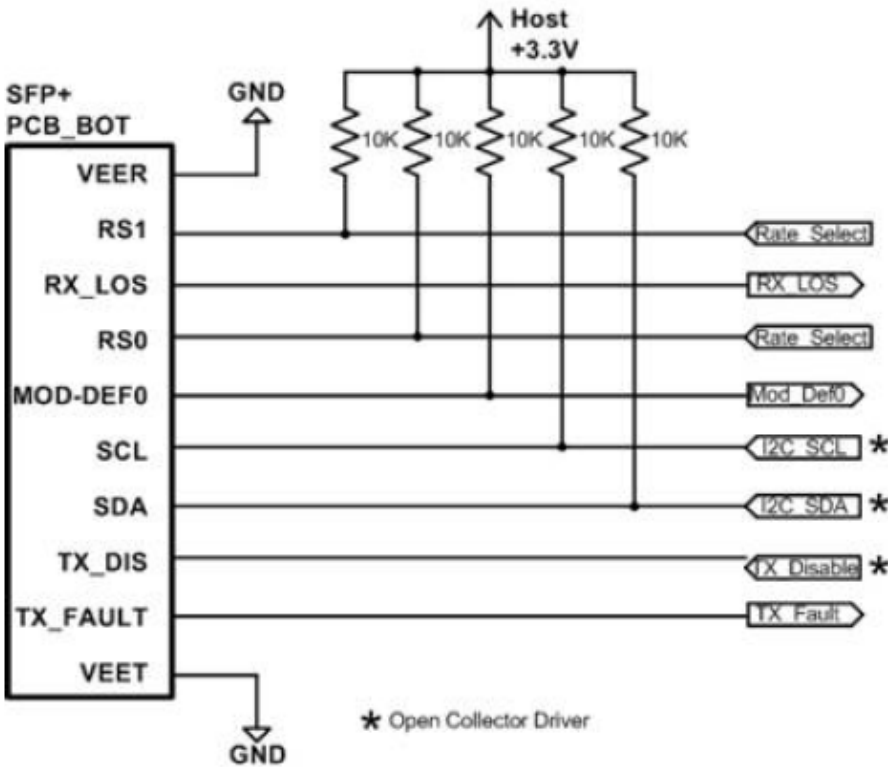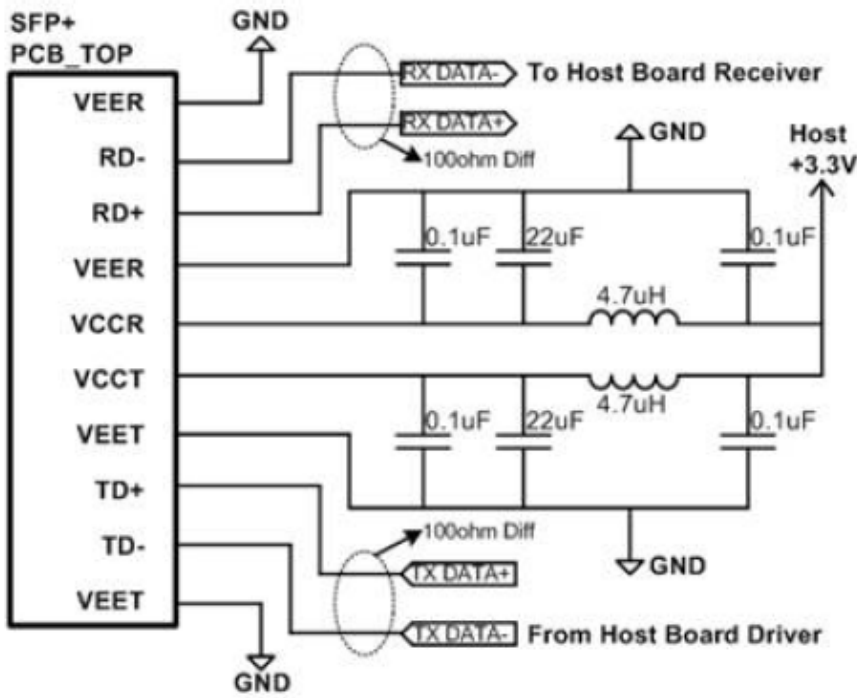

14. MECHANICAL DIMENSIONS

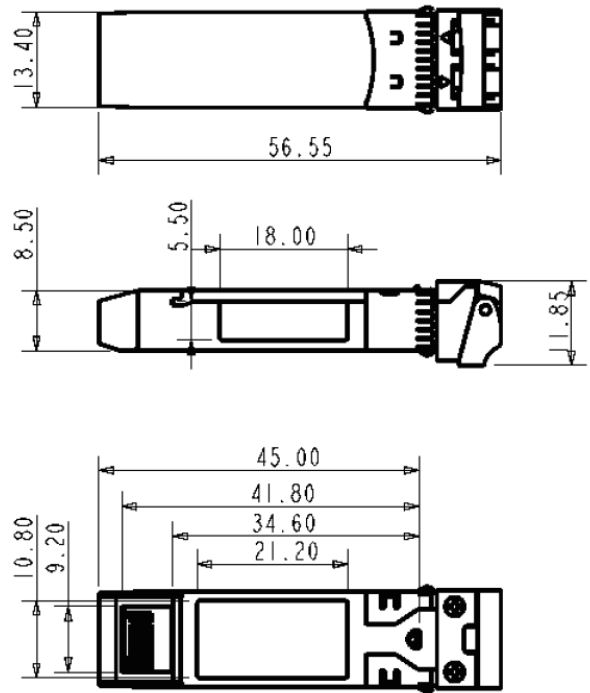

14. REGULATORY COMPLIANCE

| Feature | Agency | Standard |
|--------------------------|--------|---|
| Laser Safety | FDA | CDRH 21 CFR 1040 and Laser Notice No. 50 |
| Product Safety | BST | EN 60825-1: 2007 EN 60825-2: 2004 EN 60950-1: 2006 |
| Environmental protection | SGS | RoHS Directive 2002/95/EC |
| EMC | CCIC | EN 55022: 2006+A1: 2007 EN 55024: 1998+A1: 2001+A2: 2003 |

15. ORDERING INFORMATION

| Part Number | Product Description |
|--------------|----------------------|
| PT-25G-SR-85 | 25G SFP28 850NM 100M |

16. IMPORTANT NOTICE

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by Profitap before they become applicable to any particular order or contract. In accordance with the Profitap policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of Profitap or others.

Further details are available from any Profitap sales representative.