

XX-6400G

PROVIDES THE DATA THAT COUNTS FOR NETWORK MONITORING

AGGREGATION, REPLICATION, ADVANCED FILTERING, LOAD BALANCING

The Profitap XX-6400G is a high-density Network Packet Broker, bringing you the power and flexibility of network traffic management with a total throughput of 6.4 Tbps in a 2U rack space.

The XX-6400G features 64 QSFP28 ports (40/100 Gbps) providing aggregation, replication, filtering and load balancing in very high bandwidth port monitoring and analysis scenarios.



KEY BENEFITS

- Optimize traffic and deliver actionable data to monitoring and security tools.
- Leverage existing infrastructure for a cost-effective increase in capabilities.
- High performance and throughput in a compact, high density footprint.
- Advanced integration with physical and virtual traffic access, analysis, and security systems.

KEY FEATURES



AGGREGATION

Aggregate two or more incoming streams of data into a single stream. Combine with the replication and filtering features to send different parts of the aggregated traffic to different output ports.



REPLICATION

Replicate a stream of data to multiple output ports. Combine with the aggregation and filtering features to send different parts of the aggregated traffic to different output ports.



FILTERING

Ensure optimum efficiency of monitoring, security tools, and bandwidth utilization by filtering traffic such that only appropriate data is sent to these network tools.



LOAD BALANCING


Distribute the traffic load between different output ports to optimize resource utilization.

USE CASES

- Balance traffic over multiple monitoring and security tools: allows incoming traffic to be distributed evenly and dynamically across multiple output ports.
- Aggregate multiple traffic streams into higher speed links.
- Replicate traffic to multiple monitoring and security tools: outputs copies of incoming traffic to multiple output ports.
- Filter specific parts of the traffic based on a wide array of allow and drop rules to ensure the appropriate traffic is sent to the appropriate tools.

HIGHLIGHTS

- Local and remote management (CLI, SSH, GUI, SNMP, Syslog)
- RESTful API support
- Layer 2–4 filtering
- Flexible role-based management access
- TACACS+/RADIUS/LDAP authentication
- Centralized authentication via Profitap Supervisor (local users, TACACS+, RADIUS, LDAP)
- Ingress VLAN tagging
- Redundant, hot-swappable, Platinum efficiency PSUs and fan modules
- High-density, 6.4 Tbps throughput in a 2U footprint
- Supports 40G, 100G
- Up to 256 x 10/25G SFP28 logical ports via fanout cables

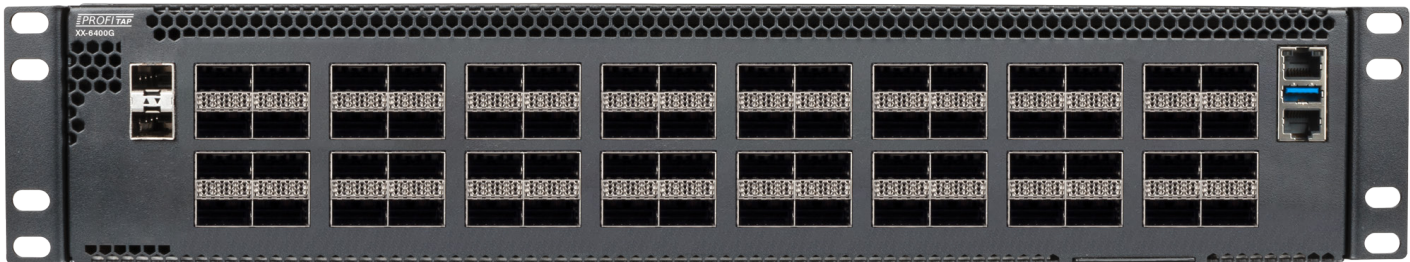


TECHNICAL SPECIFICATIONS

CONNECTORS 64 x QSFP28 ports 2 x SFP+ I/O ports 1 x RJ45 management port 1 x RJ45 console port 1 x USB 2.0 port	LEDs 1 x System status 1 x Fan status 1 x PSU1 status 1 x PSU2 status	INCLUDED ACCESSORIES 2 x 1200 W, 80+ Platinum, 100–240 VAC, 50–60 Hz PSUs 2 x C13 AC power cords 1 x RJ45 to serial port adapter 1 x Rack mounting kit
WEIGHT 16 kg — 35.3 lbs	COMPLIANCE RoHS — CE — FCC	DIMENSIONS (WxDxH) 440 x 560 x 88 mm — 17.32 x 22.05 x 3.46 in


ORDER REFERENCES

MAIN UNIT	DESCRIPTION
XX-6400G-AC	HD NPB, 64 x 40/100G QSFP28, 2 x 1200W, 100–240 VAC PSUs
WARRANTY AND MAINTENANCE	
XX-6400G-WAR-1YR	XX-6400G extended warranty — 1 year
XX-MAIN-1YR	XX-6400G extended maintenance — 1 year (software updates, professional support)

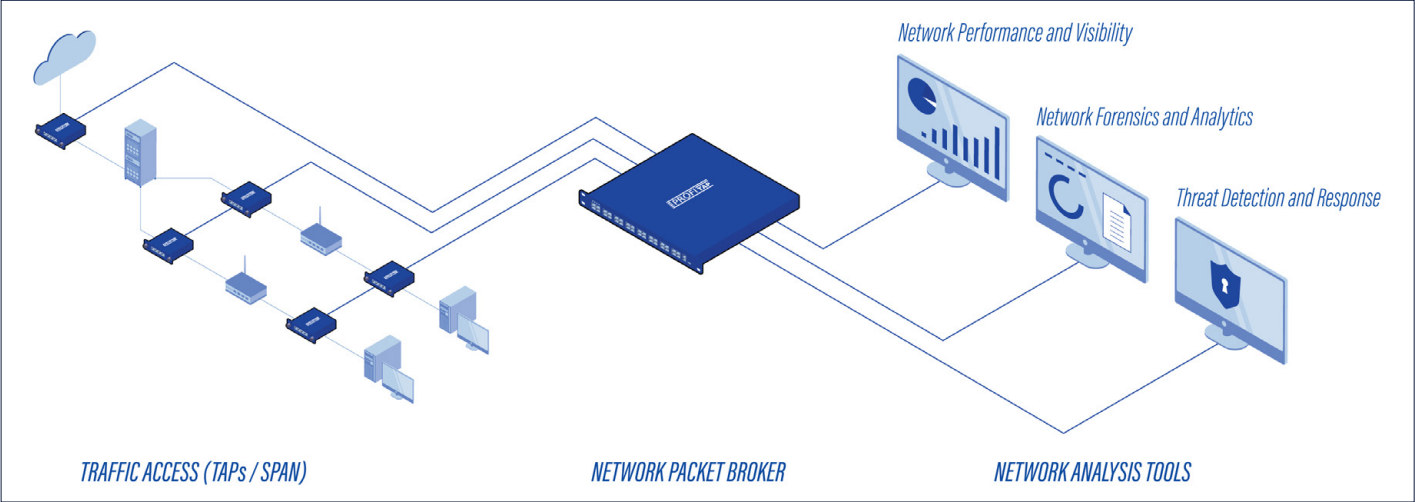

WEB GUI

XX-Series integrates a web-based management interface that allows users to configure and monitor the behavior of the device. Running locally on the device and designed with user experience and ease of use in mind, this interface enables advanced configuration settings to be set and applied quickly and easily. This web-based interface allows easy access from any OS or platform.

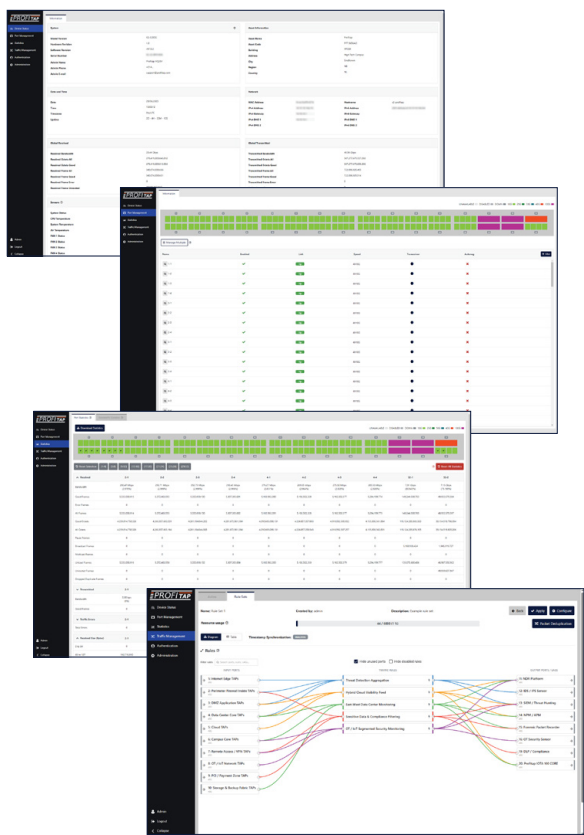

DEVICE STATUS

Device status offers a quick overview of operational statistics related to the packet broker hardware.

PORT MANAGEMENT

Port management offers instant overview of port status and speed. Users control the configuration of all transceiver modules, where each module offers additional information in the specific status section.

PORT STATISTICS

Port statistics displays and monitors the statistics counter for each of the device interfaces.

TRAFFIC MANAGEMENT

Define how the traffic will flow through the device interfaces. Using a direct control interface the user will be able to define aggregation, duplication and filtering rules.